

3590ED

3590ED "COLOUR": EVOLVED WEIGHT INDICATOR WITH 40mm DISPLAY



Digital weight indicator, with high performance 40mm RGB and very intense bright display, for a clear visibility in any environment, indoor or outdoor, thanks to colour and brightness freely configurables. Fitted with 3 serial ports, transmission protocols for data communication, completely configurable printouts, integrated alibi memory and port for connection to barcode/badge reader. The wide range of connectable accessories and printers guarantees the maximum interfaceability and versatility. CE-M approvable (OIML R-76 / EN 45501).

**The best solution
for advanced industrial
applications**

MAIN FEATURES

- 25-key alphanumeric waterproof keyboard.
- Very intense bright dot LED RGB, h=40mm, with intensity and colour quickly configurable through the keyboard.
- Backlit LCD graphic 25x100mm display.
- Easy to clean STAINLESS STEEL waterproof IP68 enclosure; resistant to harsh and corrosive environments.
- Dimensions: 280x132x185 mm.
- Suitable for use on the table, column, or wall.
- Real time clock and permanent data storage.
- Fitted alibi memory, integrated on the motherboard.
- Functions available with DINITOOLS utility
 - Configuration, calibration, data entry and print formatting.
 - Recording and filing of all the information on PC.
 - Complete retrieval of the data saved for quick substitution.
 - Instrument calibration with numeric values.
- Selection of the programme language directly in the set-up.
- 24-bit A/D converter, 4 channels, up to 3200 conv./sec. and up to 8 signal linearisation points.
- 4 independent analogue channels (up to 2 in the E-AF03 version, 1 in the E-AF09 version) for reading of the weight.
- Connection with up to 16 analogue load cells of 350 Ohm (45 load cells of 1000 Ohm) and with the main digital load cells available on the market (mod. E-AF03).
- Up to 10.000e OIML or 3 x 3000e @ 0,3 µV/e CE-M legal for trade.
- Up to 1.000.000 displayable divisions for internal factory use, with internal resolution up to 3.000.000 points.
- Connectable to printers and labellers with the command drivers.
- 110-240 Vac power supply.

MAIN CERTIFICATIONS

- EU Type Examination Certificate (45501:2015)
- OIML R76
- OIML R51 - MID
- OIML R134 (AF09)

APPLICATION SOFTWARE

- AEQ1: Totalization and formula weighing
- AEQ2: Pieces/quantity counting
- AEQ3: Weighbridges - Input/Output vehicle
- AEQ4: Statistical checking of prepackaged goods
- AEQ5: Price computing and industrial labelling
- AEQ8: Wheel and axle static weighing with 2 or various platforms
- AEQ9: Dynamic and static axle weighing with 2 platforms
- BATCH1: Single product dosage systems in loading and unloading

CUSTOMISED APPLICATIONS

Thanks to our integrated development, you can create complete customised applications in autonomy:


- wizards, operator messages
- serial port management, protocols customization
- digital I/O full management
- sequential or simultaneous automations
- data entry, custom archives

Dini Argeo can offer the service of custom development programs.

I/O SECTION

- 2 RS232 serial ports, for connection to printer, PC or PLC, radio module and optinal interfaces.
- 1 RS232 serial port (optional RS485), for connection to weight repeater, remote scale, badge reader or digital load cells.
- Fitted keyboard emulation input, for barcode/badge readers or external PC keyboard, through cable with mini DIN connector (optional).
- 4 optoisolated outputs (optional).
- 2 optoisolated inputs (optional).
- External Profibus interface (optional), for automation management.
- Modbus RTU protocol.
- Optional Bluetooth connection, for quick wireless programming of the activities and the formulas, through PC, tablet or smartphone.

DETAIL 1

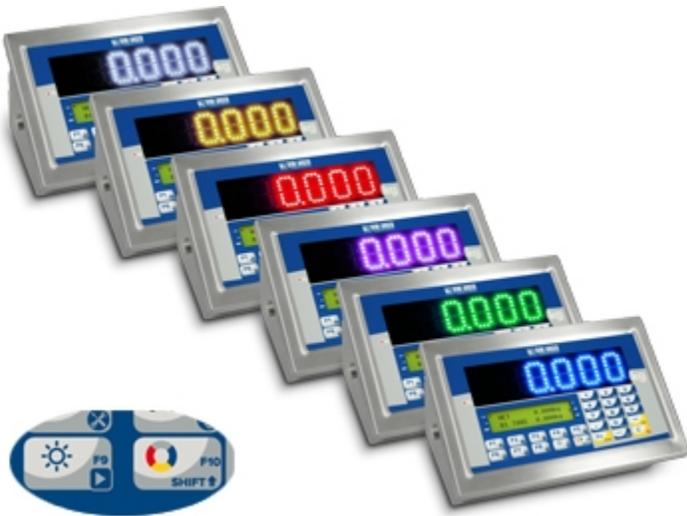



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia




COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

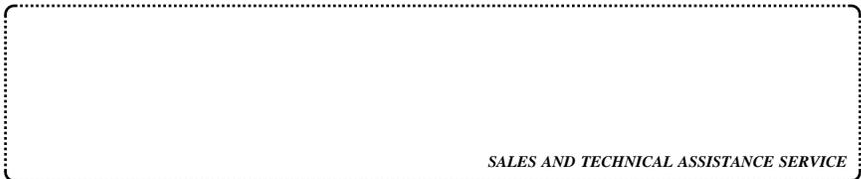

SALES AND TECHNICAL ASSISTANCE SERVICE